

EPO SOLVENT

Solvent for Epoxy and Polyurethane System



DESCRIPTION


EPO SOLVENT is a Xylene based cleaner/thinner for various epoxy and polyurethane systems

USES

- Can be used as thinner for epoxy and polyurethane based coatings, flooring and epoxy repair products.
- Recommended as a cleaning solvent for epoxy and polyurethane based coatings, flooring and epoxy repair materials.
- Cleanup of equipment and tools of various epoxy and polyurethane system before hardening.
- Removal of resin based curing membranes and sealers from floor surfaces.

PRODUCT DATA

Form	Liquid
Colour	Transparent
Density @ 20°C	0.870 ± 0.1 Kg/Ltr
Packing	20 Ltr
Shelf life	12 months, In unopened package, dry and cool environments

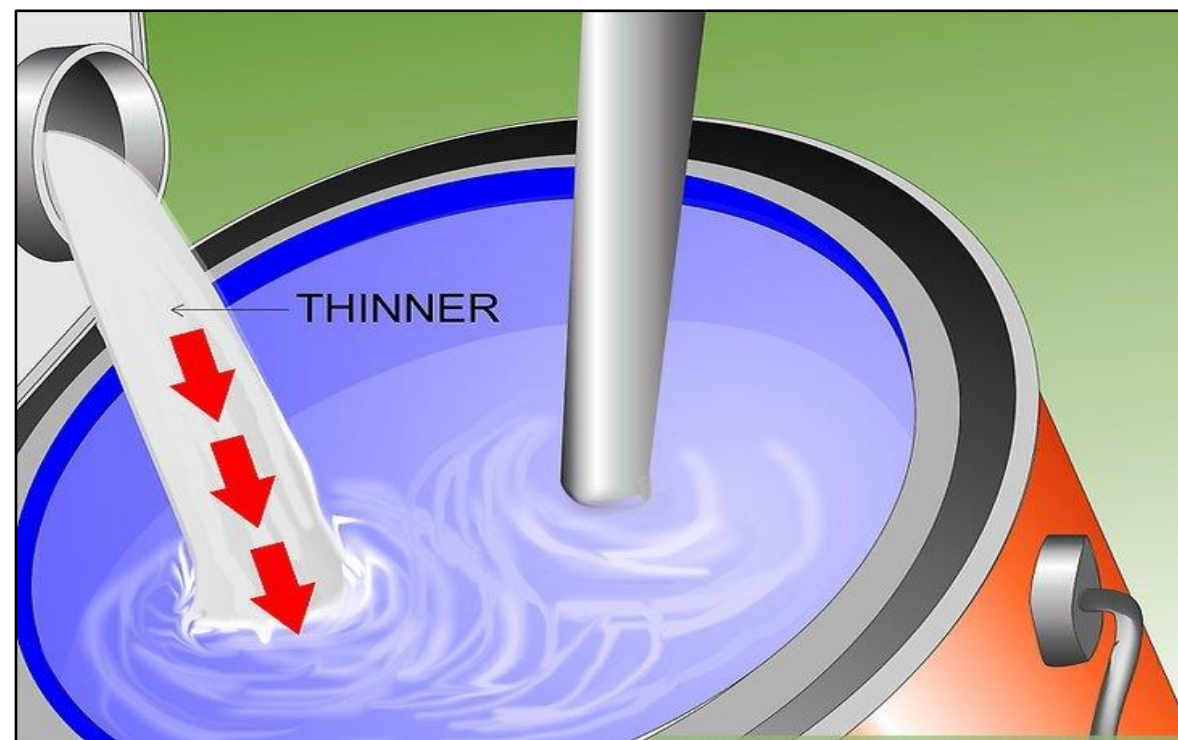

PRECAUTION

- Do not use near open flame
- Use only in well ventilated areas
- Flash point is 35°C

HEALTH AND SAFETY PRECAUTIONS

- **EPO SOLVENT** is flammable, do not expose to naked flames or other sources of ignition
- No smoking, container should be tightly sealed when not in use.
- Avoid inhalation of solvent vapour
- Ensure adequate ventilation while working in closed areas.
- Suitable breathing apparatus is recommended.

EPO SOLVENT

Ver 03/20

EPO GULF SPECIALITIES CO.

Kuwait, Amghara Industrial area
Block 4 Building 95 – 97 – 99
P.O box 12017 – Tel: +965 22272590
info@epogulf.com

WWW.EPOGULF.COM



EPO YAPI KIMYA CO.

Cement – Concrete Technology
Turkey, Istanbul, Tuzla, Orhanlı
Tel: +90 2165932294
info@epo.com.tr